


SEHESS-D02-10/15/20/25/30

堆叠式户用高压储能系统

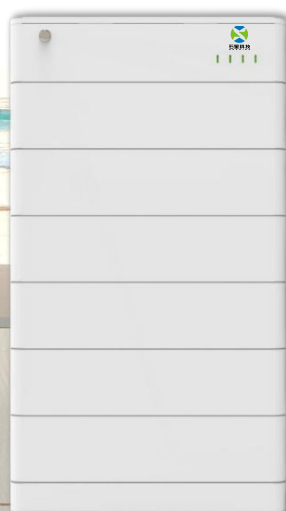

安装便捷

模块化快速盲插式连接，无需任何布线，安装效率提高70%



更高效

容量10.36-31.08kWh，高压系统，效率更高



安全&可靠

磷酸铁锂电池（LFP），安全性强，循环寿命长



智能操作

电池模块地址自动识别



环境适应性

防护等级IP55



完美兼容

兼容市场绝大部分主流逆变器

SEHESS-D02-10/15/20/25/30

堆叠式户用高压储能系统



技术参数	SEHESS-D02-10	SEHESS-D02-15	SEHESS-D02-20	SEHESS-D02-25	SEHESS-D02-30
单体电芯	磷酸铁锂 (LiFePO4) 27Ah				
单电池模块容量(kWh)	5.18				
电池模块数量	2	3	4	5	6
系统容量(kWh)	10.36	15.54	20.72	25.9	31.08
额定工作电压(V)	192	288	384	480	576
工作电压范围(V)	162.0 ~ 219.0	243.0 ~ 328.5	324.0 ~ 438.0	405.0 ~ 547.5	486.0 ~ 657.0
充电温度(°C)	0 ~ 55				
放电温度(°C)	-20 ~ 55				
最大放电/充电电流(A)	35				
单电池模块重量(kg)	50				
系统重量(kg)	125	175	225	275	325
单电池模块尺寸 (mm)	660×360×160				
系统尺寸 (mm)	660×360×560	660×360×720	660×360×880	660×360×1040	660×360×1200
最高工作海拔(m)	5000 (2000以上降额)				
安装环境	室内/室外				
防护等级	IP55				
安装方式	落地 (标准)				
工作相对湿度(RH)	5%-95%				
通信	RS485/CAN				
冷却方式	自然冷却				
满足标准	CE/UL1973/IEC62619/IEC62040-1/UN38.3				

